

DrIcy 150



Insulated chest container for Dry Ice transport and delivery

- Comfortable top opening, useful for optimizing the load capacity.
- Containment capacity: 120 kg of dry ice in 3 mm pellets.
- Base with wheels or pallets.
- Reduced height from the ground to facilitate load and collection.
- Perfectly stackable, thanks to the special housings on the lid.
- The small dimensions allow transport on traditional small and medium-sized vehicles.
- Produced with rotational molding technology: container and monobloc door (without sharp edges, joints and welds).
- Fully recyclable at the end of the operating life.
- Easily washable.
- DrIcy containers are suitable to be contained dry ice at a temperature of $-78,5^{\circ}\text{C}$.
- Since every plastic material become brittle once in contact with a very low temperature medium, users must not use tools (i.e. metal bars, hammers) that could damage the inner surface of the DrIcy.


MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and the lid; suitable for food contact.	Polyurethane	insulating material between the walls of the container and the lid; free of CFC and HCFC.
Silicone	gasket.	Stainless steel	closing hooks, gas springs protection casing.
Galvanized steel	hinge rods, reinforced frame, feet.		

TECHNICAL CHARACTERISTICS

	<p>Double adjustable stainless steel closure with eyelet for seal.</p>		<p>Flat bottom with central drain holes.</p>
	<p>Easily replaceable lid sealing gasket.</p>		<p>Hole with drainage cap positioned on the bottom of the container.</p>
	<p>Ergonomic handles inserted on the body to facilitate safe handling</p>		<p>Dedicated housings for stacking containers.</p>
	<p>Reinforcement frame in galvanized steel.</p>		<p>Version with 4 wheels (2 swivel and 2 swivel with brake). Version with 4 galvanized steel feet mounted on integrated support plates.</p>
	<p>Monobloc structure, without sharp edges, joints and welds. Insulation with CFC-free and CFFC-free polyurethane foam.</p>		<p>Label holder for the identification of the content or destination.</p>
<p>K</p>	<p>Overall heat transmission coefficient: K=0,29 W/m²K.</p>		

TECHNICAL SPECIFICATIONS

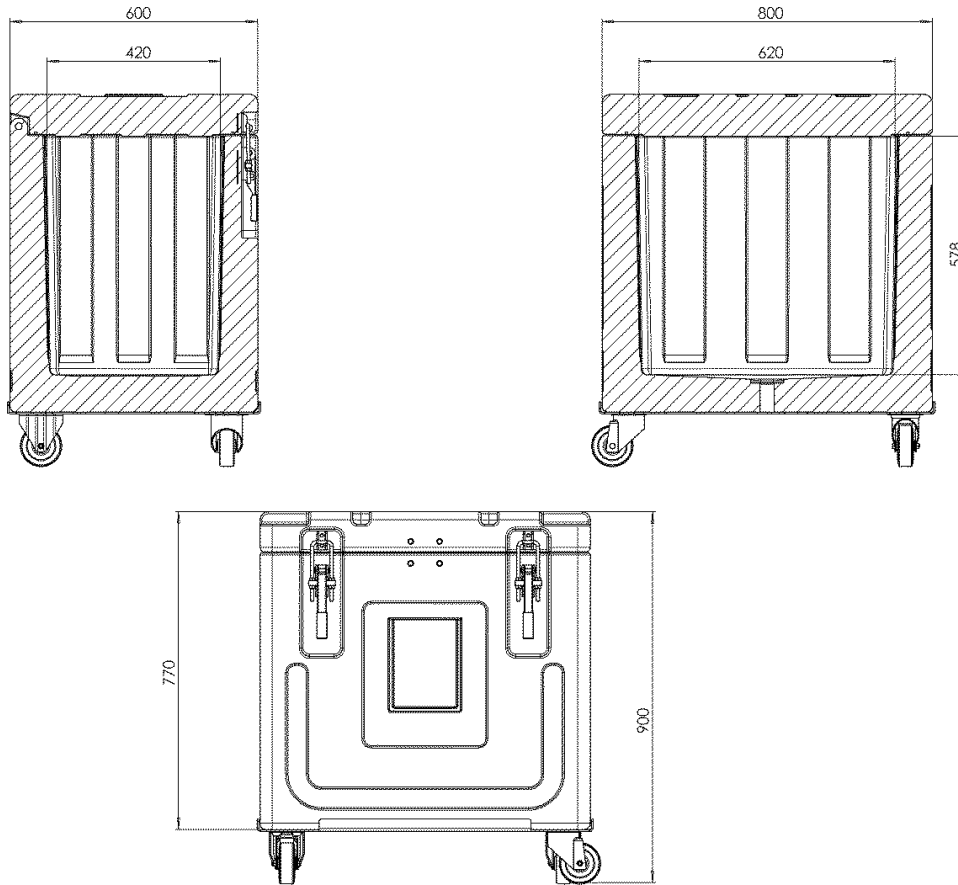

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity (l)	Weight (kg)
DrIcy 150 with castors	0150S001	grey blue melange	800X600Xh900	620x420xh578	150	49
DrIcy 150 with pallet	0150S002	grey blue melange	800X600Xh900	620x420xh578	150	49